SERIES 1000

LGT 1054

26 HP* Cub Cadet® professional-grade

Kohler® V-Twin OHV

Manual sector and pinion

3/4" diameter with dual steel wheel

drive hubs

15 amp, regulated

Cub Comfort™ deluxe high-back seat.

12-position fingertip adjustment mechanism

with 6" seat travel

16" x 6.5'

22" x 9.5"

3.3 gal. easy fill, rustproof

2.0 gt

475"

69"

567 lbs.

54" heavy-duty triple blades

12-gauge steel

4 wheels, 1 roller (front)

LGTX 1050

Kohler® V-Twin OHV

Electronic Power Steering (EPS)

3/4" diameter with dual steel wheel

drive hubs

25 amp, regulated

Cub Comfort™ deluxe high-back

seat, 12-position fingertip adjustment

mechanism with 6" seat travel

16" x 6.5"

22" x 9.5"

3.3 gal. easy fill, rustproof

2.0 at

47.5"

69"

548 lbs

50" heavy-duty triple blades

12-gauge steel

4 wheels

- 2/cast-iron sleeve

- Fully pressurized automotive-style oil pump w/spin-on oil filter

- Automatic w/heavy-duty hydrostatic pump

Heavy-duty helt

. Standard

Die-cast aluminum

Heavy-duty cast-iron — 5-year limited warranty

- 3/4" w/grease fittings

Robotically welded frame assembly

Corrosion- and dent-resistant high-impact ABS -

Steel fender w/twin rear fender flares w/grab handles and GT-style twin-tube steel bumper

12V/heavy-duty 230 cold crank amp. 12V/heavy-duty 260 cold crank amp. 12V/heavy-duty 260 cold crank amp. 12V/heavy-duty 260 cold crank amp.

Flywheel alternator —

Standard

Digital hour meter, change oil service minder, battery voltage monitor, park brake and PTO start sequence LEDs

Neutral start, operator presence, reverse safety switch, brake pedal lock, RevTEK™ reverse mowing technology

Electronic fingertip engagement for smooth operation of deck or attachments -

- Manual/6-position/spring-assisted

Automotive-style disc

- 0 - 5.2 mph

- 0 - 2.3 mph

- 1.5" - 4" -

Heavy-duty Kevlar® belt

Optional

Die-cast aluminum spindle housings w/ball bearings for long life

QuickAttach™ in seconds, no tools required

Patented SmartJet™ high-pressure deck washing system

- 3-year/120-hr and 5-year/500-hr limited warranty -

All steel w/heavy-duty bearings

Heavy-duty 9-gauge steel frame rails — 5-year limited warranty

ENGINE

Engine Type

Lubrication

DRIVE SYSTEM Drive System

Cruise Control

STEERING Steering Assist

Front Axle

Spindles

CHASSIS

Ball Joints

Rear Axle Diameter

Turning Radius

Chassis Type Frame

Hood & Grill

Alternator

Headlights

OPERATION

PTO Clutch

Deck Lift

Front Tires

Rear Tires

Wheelhase

Overall Length

MOWER DECK

Forward Speed

Reverse Speed Fuel Tank Capacity

Engine Oil Capacity

Transmission Oil Capacity

Estimated Weight w/Deck

Cutting Width/Blades

Deck Cutting Height

Deck Construction

Deck Drive System

Deck Attach/Remova

Anti-scalping

Deck Spindles

Deck Pulleys

Deck Wash

WARRANTY[†]

Mulch Kit

Brakes

Seat

Battery

Fender & Bumper

Charging System

Safety Systems

System Monitor Package

ADDITIONAL SPECIFICATIONS

ELECTRICAL SYSTEM

Cylinders/Material

Engine to Transmission

Transmission Housing

Cub Cade T

25 amp, regulated

Cub Comfort™ deluxe high-back

seat, 12-position fingertip adjustment

mechanism with 6" seat travel

16" x 7.5"

23" x 10.5"

3.3 gal. easy fill, rustproof

2.1 at

49'

68"

587 lbs

54" heavy-duty triple blades

11-gauge steel

4 wheels, 1 rear striping roller

LGTX 1054

Kohler® V-Twin OHV

Electronic Power Steering (EPS)

3/4" diameter with dual steel

wheel drive hubs

25 amp, regulated

Cub Comfort™ deluxe high-back

seat, 12-position fingertip adjustment

mechanism with 6" seat travel

16" x 6.5'

22" x 9.5"

3.3 gal. easy fill, rustproof

2.0 gt.


47.5"

69"

567 lbs

54" heavy-duty triple blades

11-gauge steel

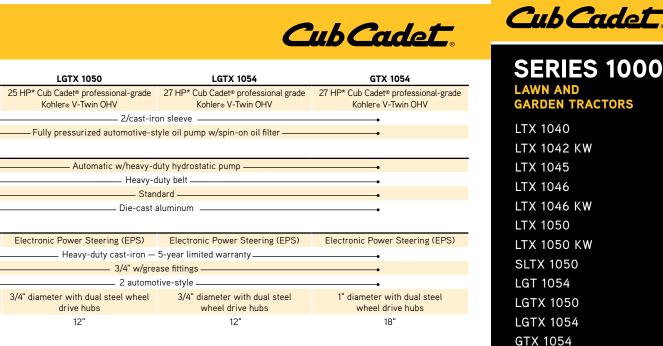

FEATURES

ELECTRONIC POWER STEERING (EPS) (on select Series 1000 models)

..........

42", 46" TWIN-BLADE DECKS AND 50". 54" TRIPLE-BLADE DECKS

CRUISE CONTROL

HEAVY-DUTY 9-GAUGE STEEL FRAME RAILS

PADDED FOOT RESTS

FENDER FLARES WITH GLOVE BOX

PATENTED SMARTJET™ DECK WASH SYSTEM

FULL LINE OF ATTACHMENTS AND ACCESSORIES AVAILABLE

ACCURATE EASY-TO-READ FUEL GAUGE

..........

3- AND 5-YEAR LIMITED WARRANTY[†]

See specifications for warranty information



TURNS BETTER. CUTS BETTER. FLAT OUT BETTER.

The Series 1000 Lawn Tractor is simply the most advanced, most rewarding lawn tractor in its category. An ultra-tight turning radius and available Electronic Power Steering mean you can make tight turns easily. And it's the only tractor in its class that can give you that amazing Cub Cadet Signature Cut™. So your lawn looks great, your home looks beautiful, and you look smart.

INNOVATIVE FEATURES FOR AN INCREDIBLE EXPERIENCE. THAT'S THE CUB CADET ADVANTAGE.



UNSURPASSED RESULTS OF THE CUB CADET SIGNATURE CUT™

Aerospace engineers created a combination of superior deck design and system components optimized for flawless performance, low maintenance and professional-quality cut. Only from Cub Cadet.



REMARKABLE MANEUVERABILITY & COMFORT

It's the only series of tractors in its class to feature an ultra-tight turning radius, power steering (on select models), and rider-control comfort for all-day ease of use.



LEGENDARY CUB CADET PERFORMANCE AND DURABILITY

Only Cub Cadet combines features like a fully welded steel frame with the thickest gauge steel in its class, high-performance professional grade engines and unbeatable 5-year factory warranty included.

LOCATE A DEALER AT **CUBCADET.COM** INNOVATIONS NO ONE ELSE CAN DELIVER. AN EXPERIENCE NO ONE ELSE CAN MATCH. PROVE IT TO YOURSELF WITH A TEST DRIVE.

This brochure is for advertisement purposes only. The product depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual. Before operating the machine, read, understand and follow all instructions in the manual and on the machine. Specifications and programs are subject to change without notice. Images may not reflect dealer inventory and/or unit specification

*as rated by engine manufacturer †See your local Cub Cadet Independent Dealer for warranty details.

773-04475b Printed in U.S.A. 12/11 © 2012 Cub Cadet



NGINE	LTX 1040	LTX 1042 KW	LTX 1045				
Engine Type	19 HP* Cub Cadet® professional-grade Kohler⊛ single-cylinder OHV	18 HP* Cub Cadet® professional-grade Kawasaki® V-Twin OHV	20 HP* Cub Cadet® professional-grade Kohler⊛ single-cylinder OHV				
Cylinders/Material	1/cast-iron sleeve	2/cast-iron sleeve	1/cast-iron sleeve				
Lubrication	•———Fully p	ressurized automotive-style oil pump w/spin-or	n oil filter ——•				
DRIVE SYSTEM							
Drive System	Automatic CVT w/cruise control	Automatic w/heavy-duty hydrostatic pump	Automatic w/heavy-duty hydrostatic num				
Engine to Transmission	Twin CVT drive belt	Heavy-duty belt	Heavy-duty belt				
Cruise Control	TWITT CV T GITVE BELL	Standard —	• • • • • • • • • • • • • • • • • • •				
Transmission Housing	•	———— Die-cast aluminum					
9		Die-Cast atummum					
STEERING							
Steering		Manual sector & pinion	•				
Front Axle	•———Heavy-duty cast-iron w/dual grease fittings — 5-year limited warranty——•						
Spindles	•	- 3/4" - 2 automotive-style					
Ball Joints							
Rear Axle Diameter	•	— 3/4" diameter with dual steel drive hubs —	•				
Turning Radius	•	12"	•				
CHASSIS							
Chassis Type	•	Robotically welded frame assembly —	•				
Frame	•———Heavy-	duty 9-gauge steel frame rails — 5-year limited	warranty —				
Hood & Grill	•	Corrosion- and dent-resistant high-impact AB	s ——•				
Fender & Bumper**	Steel fender w/grab handles	Steel fender w/grab handles and glove box	Steel fender w/grab handles and glove box				
ELECTRICAL SYSTEM							
Alternator	•	15 amp. regulated	•				
Battery	12V/H.D. 190 cold crank amp	12V/H.D. 230 cold crank amp	12V/H.D. 190 cold crank amp				
Charging System		Flywheel alternator					
Headlights	•	Standard —	•				
System Monitor package	Digital hour meter, change oil s	ervice minder, battery voltage monitor, park bro	ake and PTO start sequence LEDs				
	-	e, reverse safety switch, brake pedal lock, Rev	•				
Safety Systems	Neutral Start, Operator Dresent	e. Tevel se salety switch, blake bedat tock, Nev					
Safety Systems	Neutral Start, operator present	e, reverse safety switch, brake pedal lock, Nev	TEX Teverse mowing technology				
PERATION	Neutral start, operator presenc		TEX reverse moving technology				
PTO Clutch	Neutral start, operator present	Manual lever control	TEX Teverse mowing technology				
DPERATION PTO Clutch Deck Lift	Neutral start, operator present	Manual lever control Manual/12-position	• • • • • • • • • • • • • • • • • • •				
PTO Clutch		Manual lever control Manual/12-position Automotive-style disc					
PPERATION PTO Clutch Deck Lift Brakes Seat	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel	Manual lever control Manual/12-position	Cub Comfort™ high-back seat,				
PPERATION PTO Clutch Deck Lift Brakes Seat	Cub Comfort™ mid-back seat,	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel	Cub Comfort™ high-back seat,				
PPERATION PTO Clutch Deck Lift Brakes Seat	Cub Comfort™ mid-back seat,	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel —15" x 6"	Cub Comfort™ high-back seat,				
PPERATION PTO Clutch Deck Lift Brakes Seat	Cub Comfort™ mid-back seat,	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel	Cub Comfort™ high-back seat,				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires	Cub Comfort™ mid-back seat,	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel —15" x 6"	Cub Comfort™ high-back seat,				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires	Cub Comfort™ mid-back seat,	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 – 5.2 mph 0 – 2.3 mph	Cub Comfort™ high-back seat,				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph	Cub Comfort™ high-back seat, 12 positions with 6" seat travel				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 – 5.2 mph 0 – 2.3 mph	Cub Comfort™ high-back seat, 12 positions with 6" seat travel				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel	— Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 – 5.2 mph — 0 – 2.3 mph — 3.3 gal. easy fill, rustproof	Cub Comfort™ high-back seat, 12 positions with 6" seat travel				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel 0 – 5.2 mph	— Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph — 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt.	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel 0 – 5.2 mph	— Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 – 5.2 mph — 0 – 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt.	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel 0 – 5.2 mph	— Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 – 5.2 mph — 0 – 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5"	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel 0 - 5.2 mph 19 oz.	— Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph — 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5" — 69"	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph 1.9 qt.				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel 0 - 5.2 mph 19 oz. 468 lbs.	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5" — 69" — 498 lbs.	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph 1.9 qt.				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel 0 - 5.2 mph 19 oz.	— Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph — 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5" — 69"	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph 1.9 qt. 510 lbs.				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades Deck Cutting Height	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel 0 - 5.2 mph 19 oz. 468 lbs.	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph — 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5" — 69" — 498 lbs. 42" heavy-duty twin blades — 1.5" - 4"	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph 1.9 qt. 510 lbs.				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel 0 - 5.2 mph 19 oz. 468 lbs.	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph — 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5" — 69" — 498 lbs. 42" heavy-duty twin blades — 1.5" - 4" — 12-gauge steel	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph 1.9 qt. 510 lbs.				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck AOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel 0 - 5.2 mph 19 oz. 468 lbs.	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph — 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5" — 69" — 498 lbs. 42" heavy-duty twin blades — 1.5" - 4" — 12-gauge steel — Heavy-duty Kevlar® belt	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph 1.9 qt. 510 lbs.				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck AOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System Anti-scalping	Cub Comfort™ mid-back seat, 12 positions with 6" seat travel 0 - 5.2 mph 19 oz. 468 lbs.	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph — 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5" — 69" — 498 lbs. 42" heavy-duty twin blades — 1.5" - 4" — 12-gauge steel — Heavy-duty Kevlar® belt — 4 wheels	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph 1.9 qt. 510 lbs.				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck AOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System Anti-scalping Mulch Kit	Cub Comfort" mid-back seat, 12 positions with 6" seat travel 0 – 5.2 mph 19 oz. 468 lbs. 42" heavy-duty twin blades	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph — 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5" — 69" — 498 lbs. 42" heavy-duty twin blades — 1.5" - 4" — 12-gauge steel — Heavy-duty Kevlar® belt — 4 wheels — Optional	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph 1.9 qt. 510 lbs. 46" heavy-duty twin blades				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck AOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System Anti-scalping Mulch Kit Deck Spindles	Cub Comfort" mid-back seat, 12 positions with 6" seat travel 0 – 5.2 mph 19 oz. 468 lbs. 42" heavy-duty twin blades	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph — 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5" — 69" — 498 lbs. 42" heavy-duty twin blades — 1.5" - 4" — 12-gauge steel — Heavy-duty Kevlar® belt — 4 wheels — Optional aluminum spindle housings w/ball bearings f	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph 1.9 qt. 510 lbs. 46" heavy-duty twin blades				
PERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck AOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System Anti-scalping Mulch Kit Deck Spindles Deck Pulleys	Cub Comfort" mid-back seat, 12 positions with 6" seat travel 0 – 5.2 mph 19 oz. 468 lbs. 42" heavy-duty twin blades	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph — 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5" — 69" — 498 lbs. 42" heavy-duty twin blades — 1.5" - 4" — 12-gauge steel — Heavy-duty Kevlar® belt — 4 wheels — Optional aluminum spindle housings w/ball bearings f — All steel w/heavy-duty bearings	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph 1.9 qt. 510 lbs. 46" heavy-duty twin blades or long life ———				
PPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck AOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System Anti-scalping Mulch Kit Deck Spindles	Cub Comfort" mid-back seat, 12 positions with 6" seat travel 0 – 5.2 mph 19 oz. 468 lbs. 42" heavy-duty twin blades Die-cast	Manual lever control — Manual/12-position — Automotive-style disc Cub Comfort™ high-back seat, 12 positions with 6" seat travel — 15" x 6" — 20" x 8" — 0 - 5.2 mph — 0 - 2.3 mph — 3.3 gal. easy fill, rustproof — 1.6 qt. — 1.9 qt. — 47.5" — 69" — 498 lbs. 42" heavy-duty twin blades — 1.5" - 4" — 12-gauge steel — Heavy-duty Kevlar® belt — 4 wheels — Optional aluminum spindle housings w/ball bearings f	Cub Comfort™ high-back seat, 12 positions with 6" seat travel 0 - 2.3 mph 1.9 qt. 510 lbs. 46" heavy-duty twin blades or long life				

345	YEAR
LIMITED	WARRANTY

†Cub Cadet will provide a limited warranty for a period of 5 years or 500 hours, whichever occurs first, for the frame and pivoting cast-iron front axle on all new Cub Cadet Series 1000 Tractors. For complete details on 3-year and 5-year limited warranties, see your Cub Cadet Independent Dealer or operator's manual.

3 years or 120 hours, whichever comes first. Warranty does not cover normal wear on parts, batteries, and frame and front axle. Frame and front axle are covered for 5 years or 500 hours, whichever comes first. See operator's manual for details on Cub Cadet's Manufacturer's Limited Warranty for Series 1000 Lawn Tractors.

ENGINE	LTX 1046	LTX 1046 KW	LTX 1050 KW	LTX 1050	SLTX 1050		
			23 HP* Cub Cadet®	24 HP* Cub Cadet®	25 HP* Cub Cadet®		
Engine Type	22 HP* Cub Cadet®	21.5 HP* Cub Cadet®	professional-grade	professional-grade	professional-grade		
Engine Type	professional-grade Kohler⊛ V-Twin OHV	professional-grade Kawasaki® V-Twin OHV	Kawasaki®	Kohler®	Kohler⊛		
	Romers 7 Twin Off		V-Twin OHV	V-Twin OHV	V-Twin OHV		
Cylinders/Material	2/cast-iron sleeve						
Lubrication	Fully pressurized automotive-style oil pump w/spin-on oil filter						
DRIVE SYSTEM							
Drive System	•	Automatic w/h	eavy-duty hydrostatic pu	ımp ————	•		
Engine to Transmission	•		leavy-duty belt		•		
Cruise Control	• Standard •						
Transmission Housing	•	Die	e-cast aluminum ———		•		
STEERING							
Steering		Manı	ual sector & ninion ——		•		
Front Axle	•	Manual sector & pinion Heavy-duty cast-iron w/dual grease fittings — 5-year limited warranty					
Spindles	•		3/4"		•		
Ball Joints	•	2 a	automotive-style ———		•		
Rear Axle Diameter		3/4" diameter	with dual steel drive hu	hs	•		
Turning Radius		3/4 didiffeter	—— 12"———	b3			
•	•		12		•		
CHASSIS							
Chassis Type	•	-	welded frame assembly		•		
Frame	•	Heavy-duty 9-gauge stee		•	•		
Hood & Grill	•	Corrosion- and d					
Fender & Bumper**	•	Steel fender w	/grab handles and glove	box —	•		
ELECTRICAL SYSTEM							
Alternator	•		amp. regulated ———		•		
Battery	12V/H.D. 230 cold crank amp.	12V/H.D. 230 cold crank amp.	12V/H.D. 230 d	cold crank amp.	12V/H.D. 235 cold crank amp		
Charging System	Flywheel alternator						
Charging System	• Standard •						
Headlights	•	- Fty	Standard		•		
	• Digital hour r	neter, change oil service minder, bat	— Standard ————				
Headlights			— Standard ———————————————————————————————————	k brake and PTO start s	sequence LEDs		
Headlights System Monitor Package Safety Systems		neter, change oil service minder, bat	— Standard ———————————————————————————————————	k brake and PTO start s	sequence LEDs		
Headlights System Monitor Package		meter, change oil service minder, bat t, operator presence, reverse safety s	— Standard ttery voltage monitor, par switch, brake pedal lock,	k brake and PTO start s RevTEK [™] reverse mowi	equence LEDs ng technology		
Headlights System Monitor Package Safety Systems		neter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck	Standard ttery voltage monitor, pai switch, brake pedal lock, Electronic fingertip ei	k brake and PTO start s RevTEK™ reverse mowi	equence LEDs ng technology Electronic fingertip engageme for smooth operation of deck		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch	Neutral start	neter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments	Standard Itery voltage monitor, par switch, brake pedal lock, Electronic fingertip er operation of dec	k brake and PTO start s RevTEK™ reverse mowi ngagement for smooth k or attachments	equence LEDs ng technology Electronic fingertip engageme for smooth operation of deck or attachments		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift	Neutral start	neter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position	Standard Itery voltage monitor, par switch, brake pedal lock, Electronic fingertip er operation of dec	k brake and PTO start s RevTEK™ reverse mowing ngagement for smooth k or attachments 2-position	equence LEDs ng technology Electronic fingertip engageme for smooth operation of deck		
Headlights System Monitor Package Safety Systems DPERATION PTO Clutch Deck Lift Brakes	Neutral start	neter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto	Standard Itery voltage monitor, par switch, brake pedal lock, Electronic fingertip er operation of dec Manual/1 pmotive-style disc	k brake and PTO start s RevTEK™ reverse mowingagement for smooth k or attachments 2-position	equence LEDs ng technology Electronic fingertip engageme for smooth operation of deck or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift	Neutral start	neter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position	Standard Itery voltage monitor, par switch, brake pedal lock, Electronic fingertip er operation of dec Manual/1 pmotive-style disc	k brake and PTO start s RevTEK™ reverse mowingagement for smooth k or attachments 2-position	equence LEDs ng technology Electronic fingertip engageme for smooth operation of deck or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat	Neutral start	neter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto	Standard Itery voltage monitor, par switch, brake pedal lock, Electronic fingertip er operation of dec Manual/1 pmotive-style disc	k brake and PTO start s RevTEK™ reverse mowingagement for smooth k or attachments 2-position	equence LEDs ng technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems DPERATION PTO Clutch Deck Lift Brakes	Neutral start	neter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto	Standard Itery voltage monitor, par switch, brake pedal lock, Electronic fingertip er operation of dec Manual/1 monotive-style disc x seat, 12 positions with	k brake and PTO start s RevTEK™ reverse mowingagement for smooth k or attachments 2-position	equence LEDs ng technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS	Manual lever control Manual/12-position •	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto —— Cub Comfort™ high-back	Standard Itery voltage monitor, par switch, brake pedal lock, Electronic fingertip er operation of dec Manual/1 monotive-style disc x seat, 12 positions with	rk brake and PTO start s RevTEK™ reverse mowi ngagement for smooth k or attachments 2-position 6" seat travel	equence LEDs ng technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires	Manual lever control Manual/12-position 15" x 6"	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position ————————————————————————————————————	Standard Itery voltage monitor, par switch, brake pedal lock, Electronic fingertip er operation of dec Manual/1 montive-style disc x seat, 12 positions with	rk brake and PTO start s RevTEK™ reverse mowi ngagement for smooth k or attachments 2-position 6" seat travel x 6"	equence LEDs ng technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires	Manual lever control Manual/12-position 15" x 6"	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position ————————————————————————————————————	Electronic fingertip et operation of dec Manual/1 conditive-style disc conditions with 20" x 10"	rk brake and PTO start s RevTEK™ reverse mowi ngagement for smooth k or attachments 2-position 6" seat travel x 6"	equence LEDs ng technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed	Manual lever control Manual/12-position 15" x 6"	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position ————————————————————————————————————	Electronic fingertip et operation of dec Manual/1 comotive-style disc c seat, 12 positions with 20" x 10" 0 - 5.2 mph	rk brake and PTO start s RevTEK™ reverse mowi ngagement for smooth k or attachments 2-position 6" seat travel x 6" 20" x 8	equence LEDs ng technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed	Manual lever control Manual/12-position 15" x 6"	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position ————————————————————————————————————	Electronic fingertip er operation of dec Manual/1 comotive-style disc company at 12 positions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph	rk brake and PTO start s RevTEK™ reverse mowi ngagement for smooth k or attachments 2-position 6" seat travel x 6" 20" x 8	equence LEDs ng technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity	Manual lever control Manual/12-position 15" x 6"	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position ————————————————————————————————————	Electronic fingertip et operation of dec Manual/1 conditions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof—	rk brake and PTO start s RevTEK™ reverse mowi ngagement for smooth k or attachments 2-position 6" seat travel x 6" 20" x 8	equence LEDs ng technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity	Manual lever control Manual/12-position 15" x 6"	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position ————————————————————————————————————	Electronic fingertip er operation of dec Manual/1 omotive-style disc c seat, 12 positions with 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof 1.9 qt.	rk brake and PTO start s RevTEK™ reverse mowi ngagement for smooth k or attachments 2-position 6" seat travel x 6" 20" x 8	equence LEDs ng technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity	Manual lever control Manual/12-position 15" x 6"	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position ————————————————————————————————————	Electronic fingertip er operation of dec Manual/1 comotive-style disc coseat, 12 positions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof 1.9 qt. 2.0 qt.	rk brake and PTO start s RevTEK™ reverse mowi ngagement for smooth k or attachments 2-position 6" seat travel x 6" 20" x 8	equence LEDs ng technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase	Manual lever control Manual/12-position 15" x 6"	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position ————————————————————————————————————	Electronic fingertip er operation of dec Manual/1 motive-style disc cseat, 12 positions with 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof 1.9 qt. 2.0 qt. 47.5" 69"	rk brake and PTO start s RevTEK™ reverse mowi ngagement for smooth k or attachments 2-position 6" seat travel x 6" 20" x 8	equence LEDs ng technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck	Manual lever control Manual/12-position 15" x 6" 20" x 8"	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" — 3.3 gal	Electronic fingertip er operation of dec Manual/1 motive-style disc cseat, 12 positions with 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof 1.9 qt. 2.0 qt. 47.5" 69"	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel x 6" 20" x 8	Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist 16" x 6.5" 22" x 9.5"		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK	Manual lever control Manual/12-position 15" x 6" 20" x 8" 513 lbs.	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" 3.3 gal	Standard Itery voltage monitor, pai switch, brake pedal lock, Electronic fingertip ei operation of dec Manual/1 motive-style disc s seat, 12 positions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel 20" x 8	Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist 16" x 6.5" 22" x 9.5"		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades	Manual lever control Manual/12-position 15" x 6" 20" x 8"	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" 3.3 gal 513 lbs.	Electronic fingertip et operation of dec operation of dec operation of dec operation with seat, 12 positions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof - 1.9 qt. - 2.0 qt. - 47.5" - 69" 548	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel 20" x 8 1 lbs.	Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist 16" x 6.5" 22" x 9.5"		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades Deck Cutting Height	Manual lever control Manual/12-position 15" x 6" 20" x 8" 513 lbs.	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" — 3.3 gal 513 lbs.	Standard Itery voltage monitor, pai switch, brake pedal lock, Second of decomparation of	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel 20" x 8 Libs.	Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist 16" x 6.5" 22" x 9.5"		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction	Manual lever control Manual/12-position 15" x 6" 20" x 8" 513 lbs.	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" 3.3 gal 513 lbs.	Standard Itery voltage monitor, pai switch, brake pedal lock, Electronic fingertip ei operation of dec Manual/1 pmotive-style disc s seat, 12 positions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel 20" x 8 Libs.	Electronic fingertip engageme for smooth operation of declor attachments Manual/6-position/spring-assis		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System	Manual lever control Manual/12-position 15" x 6" 20" x 8" 513 lbs. 46" heavy-duty twin blades	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" 3.3 gal 513 lbs. 46" heavy-duty twin blades — Heavy-duty twin blades	Standard Itery voltage monitor, pai switch, brake pedal lock, Electronic fingertip er operation of dec Manual/1 motive-style disc c seat, 12 positions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel 20" x 8 it lbs.	Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist 16" x 6.5" 22" x 9.5" 548 lbs.		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System Anti-scalping	Manual lever control Manual/12-position 15" x 6" 20" x 8" 513 lbs.	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" 3.3 gal 513 lbs. 46" heavy-duty twin blades — 1 — Heavy 4 wheels	Standard Itery voltage monitor, pai switch, brake pedal lock, Electronic fingertip er operation of dec Manual/1 motive-style disc c seat, 12 positions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel 20" x 8 Libs.	Electronic fingertip engageme for smooth operation of declor attachments Manual/6-position/spring-assis		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Engine Oil Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System Anti-scalping Mulch Kit	Manual lever control Manual/12-position 15" x 6" 20" x 8" 513 lbs. 46" heavy-duty twin blades	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" 3.3 gal 513 lbs. 46" heavy-duty twin blades — 1 — Heavy 4 wheels	Standard Itery voltage monitor, pai switch, brake pedal lock, Electronic fingertip er operation of dec Manual/1 motive-style disc seat, 12 positions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel x 6" 20" x 8 it lbs.	Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist 16" x 6.5" 22" x 9.5" 548 lbs.		
Headlights System Monitor Package Safety Systems OPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System Anti-scalping Mulch Kit Deck Spindles	Manual lever control Manual/12-position 15" x 6" 20" x 8" 513 lbs. 46" heavy-duty twin blades	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" 3.3 gal 513 lbs. 46" heavy-duty twin blades — 1 — Heavy 4 wheels — Die-cast aluminum spindle	Standard Itery voltage monitor, pai switch, brake pedal lock, Switch, brake pedal lock, Electronic fingertip er operation of dec Manual/1 Individual of the seat, 12 positions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 1. easy fill, rustproof 1.9 qt. 2.0 qt. 47.5" 69" 548 50" heavy-du 1.5" - 4" 12-gauge steel y-duty Kevlar® belt 4 wl Optional e housings w/ball bearin	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel x 6" 20" x 8 it lbs. ty triple blades	Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist 16" x 6.5" 22" x 9.5" 548 lbs.		
Headlights System Monitor Package Safety Systems DPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System Anti-scalping Mulch Kit Deck Spindles Deck Pulleys	Manual lever control Manual/12-position 15" x 6" 20" x 8" 513 lbs. 46" heavy-duty twin blades	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" 3.3 gal 513 lbs. 46" heavy-duty twin blades — Heavy 4 wheels — Die-cast aluminum spindle — All steel y All steel y	Electronic fingertip el operation of dec Manual/1 comotive-style disc seat, 12 positions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 0 - 2.3 mph 1. easy fill, rustproof 1. 9 qt. 2.0 qt. 47.5" 69" 548 50" heavy-du 1.5" - 4" 12-gauge steel y-duty Kevlar® belt 4 wl Optional e housings w/ball bearin w/heavy-duty bearings -	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel × 6" 20" x 8 It lbs. ty triple blades	Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist 16" x 6.5" 22" x 9.5" 548 lbs. 50" heavy-duty triple blades		
Headlights System Monitor Package Safety Systems DPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System Anti-scalping Mulch Kit Deck Spindles Deck Pulleys Deck Attach/Removal	Manual lever control Manual/12-position 15" x 6" 20" x 8" 513 lbs. 46" heavy-duty twin blades	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" — 3.3 gal 513 lbs. 46" heavy-duty twin blades — Heavy 4 wheels — Die-cast aluminum spindl — All steel w — QuickAttach™ i	Electronic fingertip er operation of dec operation of decorption o	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel 20" x 8 it lbs. ty triple blades meels meets meets meets meets meets meets meets meets meets	lequence LEDs Ing technology Electronic fingertip engageme for smooth operation of decl or attachments Manual/6-position/spring-assist 16" x 6.5" 22" x 9.5" 548 lbs. 50" heavy-duty triple blades		
Headlights System Monitor Package Safety Systems DPERATION PTO Clutch Deck Lift Brakes Seat ADDITIONAL SPECIFICATIONS Front Tires Rear Tires Forward Speed Reverse Speed Fuel Tank Capacity Transmission Oil Capacity Wheelbase Overall Length Estimated Weight w/Deck MOWER DECK Cutting Width/Blades Deck Cutting Height Deck Construction Deck Drive System Anti-scalping Mulch Kit Deck Spindles Deck Pulleys	Manual lever control Manual/12-position 15" x 6" 20" x 8" 513 lbs. 46" heavy-duty twin blades	meter, change oil service minder, bat t, operator presence, reverse safety s Electronic fingertip engagement for smooth operation of deck or attachments Manual/12-position — Auto — Cub Comfort™ high-back 15" x 6" 20" x 8" — 3.3 gal 513 lbs. 46" heavy-duty twin blades — Heavy 4 wheels — Die-cast aluminum spindl — All steel w — QuickAttach™ i	Electronic fingertip el operation of dec Manual/1 comotive-style disc seat, 12 positions with 15" 20" x 10" 0 - 5.2 mph 0 - 2.3 mph 0 - 2.3 mph 1. easy fill, rustproof 1. 9 qt. 2.0 qt. 47.5" 69" 548 50" heavy-du 1.5" - 4" 12-gauge steel y-duty Kevlar® belt 4 wl Optional e housings w/ball bearin w/heavy-duty bearings -	RevTEK™ reverse mowingagement for smooth k or attachments 2-position 6" seat travel 20" x 8 it lbs. ty triple blades meels meets meets meets meets meets meets meets meets meets	Electronic fingertip engageme for smooth operation of deck or attachments Manual/6-position/spring-assist 16" x 6.5" 22" x 9.5" 548 lbs. 50" heavy-duty triple blades		

- 3-year/120-hr and 5-year/500-hr limited warranty —



^{*} as rated by engine manufacturer

** Front bumper standard on LTX 1042 KW, LTX 1046 KW & LTX 1050 KW.

† See your local Cub Cadet Independent Dealer for warranty details.